BY CLASS SUBCLASS

FIG. 1A

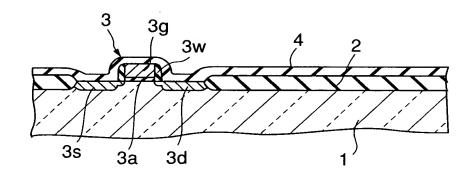


FIG. 1B

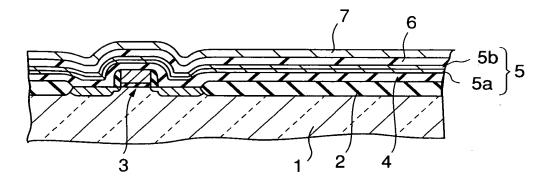


FIG. 1C

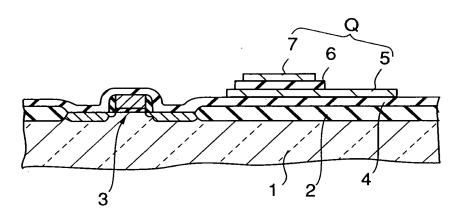


FIG. 1D

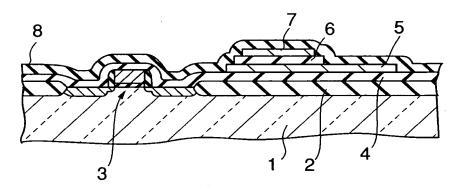


FIG. 1E

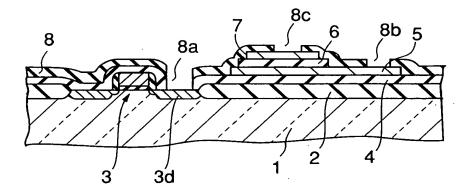


FIG. 1F

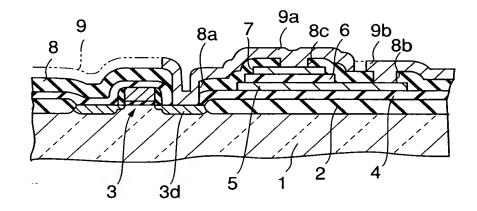
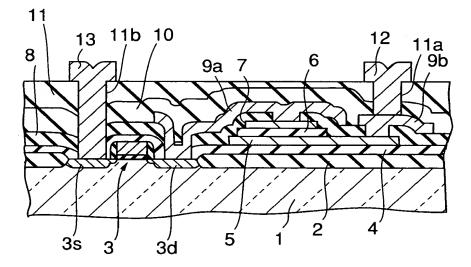


FIG. 1G






FIG. 2A

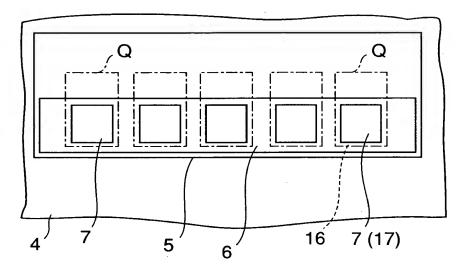


FIG. 2B

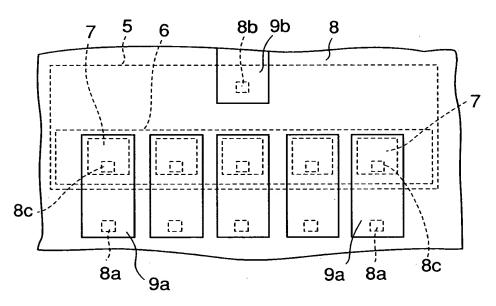


FIG. 3

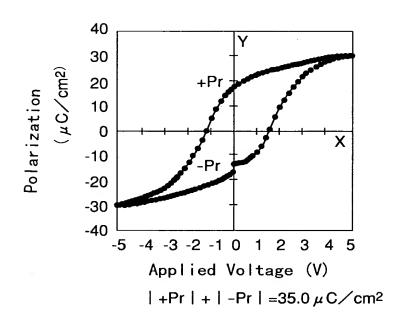


FIG. 4A (Prior Art)

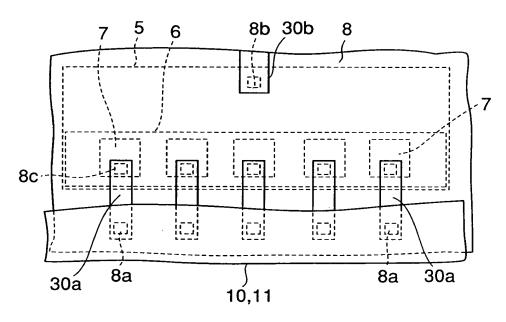


FIG. 4B (Prior Art) 40 30 Polarization (μ C/cm²⁾ 20 10 0 -10 -20 -30 -40 -4 -3 -2 -1 0 2 3 Applied Voltage (V) $| +Pr | + | -Pr | = 24.2 \,\mu\,C/cm^2$

FIG. 5A

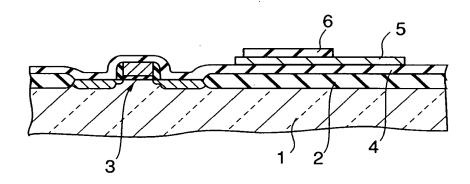


FIG. 5B

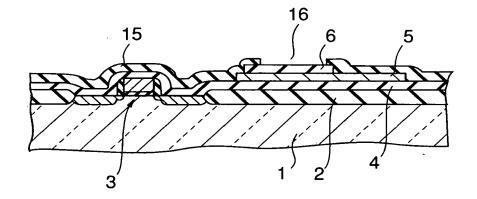


FIG. 5C


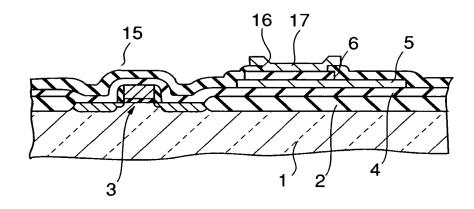


FIG. 5D

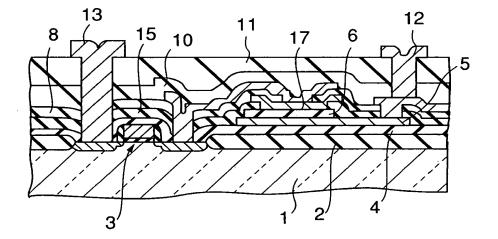

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
CRAFTSMAN		

FIG. 6A

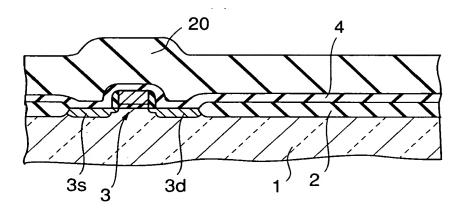


FIG. 6B

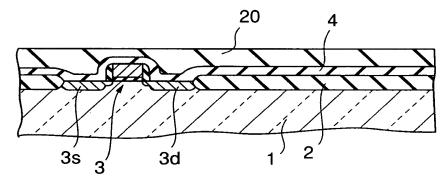


FIG. 6C


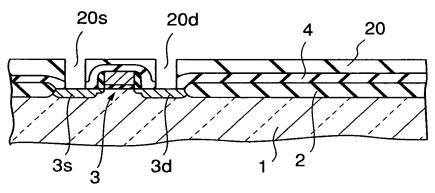


FIG. 6D

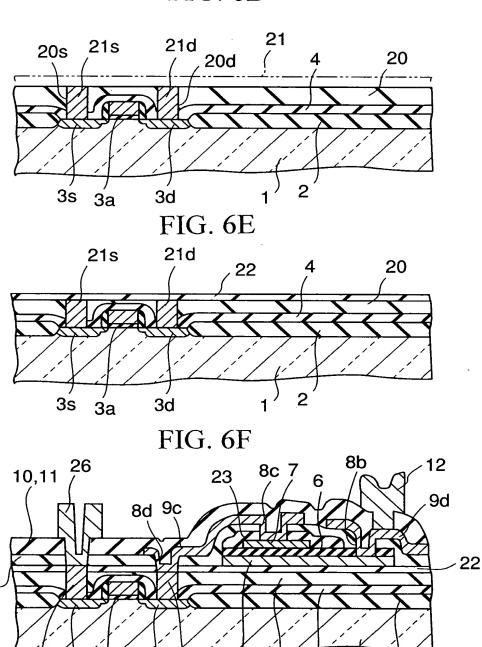

3s

За

3d

21d 5